

08/14/00  
1c903 U.S. PTO

8/15/00

A/

1c869 U.S. PTO  
09/638463  
08/14/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Forssell et al.

Serial No. TO BE ASSIGNED

Corresponding to PCT/FI99/00106, filed 11 February 1999

Filed: August 14, 2000

Docket No.: 781.369USW1

Title: ROUTING AREA UPDATE IN PACKET RADIO NETWORK

CERTIFICATE UNDER 37 C.F.R. 1.10:

'Express Mail' mailing number: EL492431637US

Date of Deposit: August 14, 2000

The undersigned hereby certifies that this Transmittal Letter and the paper or fee, as described herein, are being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

By: Jennifer Carey

Jennifer Carey

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

**REQUEST FOR CONTINUATION OF AN INTERNATIONAL APPLICATION**  
**UNDER 37 C.F.R. §1.53(b)**

This is a request for filing a continuation application under 37 C.F.R. §1.53(b) of prior pending international application number PCT/FI99/00106 filed on 11 February 1999 entitled ROUTING AREA UPDATE IN PACKET RADIO NETWORK, which designated the United States.

1. ☒ Enclosed is a patent application containing 10 pages of specification, 2 pages of claims and 3 sheet(s) of drawings.
2. ☒ A preliminary amendment is enclosed.
3. ☒ Please amend the specification by inserting the following paragraph after the title:

This application is a continuation of international application serial number PCT/FI99/00106, filed 11 February 1999.

4. ☐ Small entity status
  - a. ☐ A small entity statement is enclosed.
  - b. ☐ A small entity statement was filed in the prior non provisional application.
  - c. ☐ is no longer claimed.

The filing fee is calculated below

CLAIMS				
	Number Filed	Number Extra	Rate	Fee
Total Claims	9		X \$18.00	\$
Indep. Claims	2		X \$78.00	\$
Multiply Dependent Claims				\$
Basic Fee				\$ 690.00
TOTAL				\$ 690.00


5. ☒ Payment of filing fees  
☐ A check in the amount of \$690.00 is enclosed.  
☐ Please charge Deposit Account Number 50-1038.  
☒ Is deferred.
6. ☒ The Commissioner is hereby authorized to credit any overpayment or charge any fees required under 37 C.F.R. §1.16-1.18 to Deposit Account Number 50-1038.
7. ☒ The priority of Finnish application number 980340, filed 13 February 1998, is claimed under 35 U.S.C. §119.  
☐ A certified copy of the priority application is enclosed.
8. ☒ An UNSIGNED Declaration is enclosed.
9. ☐ An assignment of the invention to Nokia Networks OY, Recordation Form Cover Sheet (Patents Only) and a check in the amount of \$40.
10. ☒ An Information Disclosure Statement, Form PTO 1449 and copies of 7 citations are enclosed.
11. ☒ Correspondence Address
12. ☒ Address all correspondence to Michael B. Lasky.
13. ☒ Also enclosed: ABSTRACT
14. ☒ A return postcard is enclosed.

Respectfully submitted,

Altera Law Group, LLC  
10749 Bren Road East, Opus 2  
Minneapolis, MN 55343  
(952) 912-0527

Date: August 14, 2000

By:

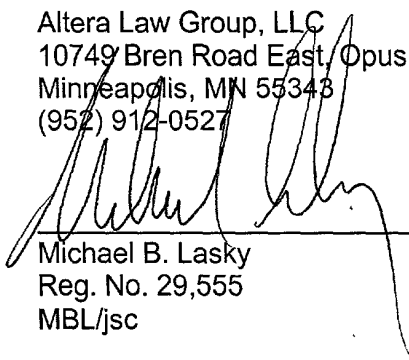  
Michael B. Lasky  
Reg. No. 29,555  
MBL/jsc

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Forssell et al.	Examiner:	UNKNOWN
Serial No.:	TO BE ASSIGNED	Group Art Unit:	TO BE ASSIGNED
Filed:	August 14, 2000	Docket No.:	781.369USW1
Title:	ROUTING AREA UPDATE IN PACKET RADIO NETWORK		

CERTIFICATE UNDER 37 C.F.R. 1.10:

'Express Mail' mailing number: EL492431637US

Date of Deposit: August 14, 2000

The undersigned hereby certifies that this Transmittal Letter and the paper or fee, as described herein, are being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

By: 

Jennifer Carey

PRELIMINARY AMENDMENT

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Please enter the following preliminary amendment into the above-referenced application.

ABSTRACT

Please insert the attached abstract into the application as the last page thereof.

CLAIMS

Please amend the claims as follows:

In claim 5 line 1, please replace "as claimed in any one of claims 3 to 4" with  
-- as claimed in claim 3 --.

### REMARKS

The above preliminary amendment is made to insert an abstract page into the application and to remove multiple dependencies from the following claims: 5

Applicant respectfully requests that this preliminary amendment be entered into the record prior to calculation of the filing fee and prior to examination and consideration of the above-identified application.


If a telephone conference would be helpful in resolving any issues concerning this communication, please contact Applicant's attorney of record, Michael B. Lasky at (952) 912-0523.

Respectfully submitted,

Altera Law Group, LLC  
10749 Bren Road East, Opus 2  
Minneapolis, MN 55343  
(952) 912-0527

Date: August 14, 2000

By:

  
\_\_\_\_\_  
Michael B. Lasky  
Reg. No. 29,555  
MBL/jsc

## ROUTING AREA UPDATE IN PACKET RADIO NETWORK

### BACKGROUND OF THE INVENTION

The invention relates to transmission of data in a packet radio network to a mobile station performing a routing area update. By way of a concrete example, the invention will be described with reference to the GPRS network, but it may be applied also to other mobile communication systems.

A General Packet Radio Service (GPRS) is a new service in the GSM. It is one of the items that are being standardized in GSM (Global System for Mobile Communication) phase 2+ at the ETSI (European Telecommunication Standard Institute). The GPRS operational environment consists of one or more sub-network service areas that are interconnected by a GPRS backbone network. A sub-network comprises a number of packet data service nodes, which are herein called GPRS support nodes (or agents) and each one of which is connected to the GSM mobile network so that it can provide packet data service for mobile data terminals via several base stations, i.e. cells. An intermediate mobile network provides circuit-switched or packet-switched data transmission between a support node and the mobile data terminals. Different sub-networks, in turn, are connected to an external data network, for example to a Public Switched Packet Data Network (PSPDN). The GPRS service can thus be used for effecting packet data transmission between mobile data terminals and external data networks, with the GSM network functioning as an access network. One of the features of the GPRS service network is that it operates almost independently of the GSM network. One of the requirements set for the GPRS service is that it must operate together with different types of external PSPDN networks, such as the Internet and X.25 networks. In other words, the GPRS service and the GSM network should be able to serve all users, irrespective of the type of data networks that they wish to be connected to via the GSM network. This means that the GSM network and GPRS service must support and process different network addressing methods and data packet formats. The data packet processing also comprises routing of packets in a packet radio network. In addition, users should be able to roam from their home GPRS network to a visited GPRS network.

Figure 1 illustrates a typical arrangement in a GPRS network. The architecture of GPRS networks is not as mature as that of the GSM networks. All GPRS terms should therefore be understood as being descriptive rather

than limiting. A typical mobile station forming a mobile data terminal consists of a mobile station MS in a mobile network and of a portable computer PC connected to the data interface of the MS. The mobile station may be, for example Nokia 2110, manufactured by Nokia Mobile Phones Ltd., Finland. By means of a PCMCIA type Nokia Cellular Datacard, manufactured by Nokia Mobile Phones Ltd., the mobile station can be connected to any portable personal computer PC that has a PCMCIA card slot. The PCMCIA card thus provides the PC with an access point that supports the protocol of the telecommunication application used in the PC, such as the CCITT X.25 or Internet Protocol IP. Alternatively, the mobile station can directly provide an access point that supports the protocol used by the PC application. Further, a mobile station 3 and a PC 4 can be integrated to form a single unit, within which the application is provided with an access point that supports the protocol used by it. An example of such a mobile station with an integrated computer is a Nokia Communicator 9000, manufactured by Nokia Mobile Phones Ltd., Finland.

Network elements BSC and MSC are previously known from a typical GSM network. The arrangement of Figure 1 comprises a separate Serving GPRS Support Node (SGSN). The support node controls certain operations of the packet radio service on the network side. The operations include logging on and off the system by the mobile stations MS, routing area updates by mobile stations MS, and data packet routing to correct destinations. In the present application, the term 'data' should be understood in the wide sense to refer to any information transmitted to/from a terminal in a digital telecommunication system. The information can comprise speech encoded into digital form, data communication between computers, telefax data, short segments of program code, etc. Information outside data transmission, such as subscriber data and related inquiries, routing area updates etc., is called signalling. The SGSN node can be located at a base station BTS, at a base station controller BSC or at a mobile switching centre MSC, or it can be separate from all these elements. The interface between the SGSN node and the base station controller BSC is called a GB interface. An area managed by one base station controller BSC is called a Base Station Subsystem BSS.

The intermediate mobile network provides packet-switched data transmission between a support node and mobile data terminal equipment. Different sub-networks, in turn, are connected to an external data network, for example to a PSPDN, via a specific Gateway GPRS Support Node GGSN.

Packet data transmission between mobile data terminals and external data networks is thus accomplished by means of the GPRS service, with the GSM network functioning as an access network. Alternatively, the gateway node GGSN can be replaced with a router. In the following, the term 'gateway node  
5 GGSN' is also to be understood to refer to a structure in which the gateway has been replaced with a router.

In Figure 1 the GPRS network connected to the GSM network comprises a number of serving GPRS support nodes SGSN and one gateway GPRS support node GGSN. The different support nodes SGSN and GGSN  
10 are interconnected via an intra-operator backbone network. It is to be understood that a GPRS network may comprise any number of support nodes SGSN and gateway nodes GGSN.

Each support node SGSN manages a packet data service in the area of one or more nodes in a cellular packet radio network. To achieve this,  
15 each support node SGSN is connected to a certain local part of the GSM system, typically to a mobile services switching centre, but in some situations it may be preferable to connect it directly to a base station subsystem BSS, i.e. to a base station controller BSC or a base station BTS. A mobile station MS in a cell communicates with a base station BTS over a radio interface and  
20 further through a mobile network with the support node SGSN to the service area of which the cell belongs. In principle, the mobile network between the support node SGSN and the mobile station MS only transmits packets between these two. For this purpose, the mobile network can offer either a circuit-switched connection or packet-switched data packet transmission between  
25 a mobile station MS and a serving support node SGSN. An example of a circuit-switched connection between a mobile station MS and an agent is presented in FI934115. An example of packet-switched data transmission between a mobile station MS and an agent is presented in FI940314. It should be noted, however, that a mobile network provides only a physical connection  
30 between a mobile station MS and a support node SGSN, and that its exact operation and structure are not relevant to the invention.

An intra-operator backbone network 11 interconnecting an operator's SGSN and GGSN can be implemented by a local area network, for example. It should be noted that an operator's GPRS network can also be im-  
35 plemented without an intra-operator backbone network, by implementing all features in a single computer, for example, but this does not cause any

changes in the call set-up principles according to the present invention.

A gateway GPRS node GGSN connects an operator's GPRS network to other operators' GPRS networks and to data networks, such as an inter-operator backbone network 12 or an IP network. An Interworking Function IWF can be arranged between the gateway node GGSN and the other networks, but usually the GGSN is simultaneously the IWF. The inter-operator backbone network 12 is one through which the gateway nodes GGSN of different operators can communicate with one another. The communication is needed to support GPRS roaming between the different GPRS networks.

The gateway node GGSN is also used for storing the location information of the GPRS mobile stations. The GGSN also routes mobile-terminated (MT) data packets. The GGSN also contains a database that associates the mobile station's network address in an IP network or an X.25 network (or simultaneously in more than one network) with the mobile station identifier in a GPRS network. When the mobile station roams from one cell to another within the area of one support node SGSN, a routing area update is needed only in the support node SGSN, and the gateway node GGSN need not be informed of the change of routing area. When the mobile station roams from a cell of one support node SGSN to a cell of another SGSN within the area of the same or a different operator, an update is also performed in the (home) gateway node GGSN so as to store the identifier of the new, visited support node and the identifier of the mobile station.

A home location register HLR is also used to authenticate subscribers at the beginning of a GPRS session. It contains a definition between a subscriber's PDP (Packet Data Protocol) address (addresses) and the subscriber's IMSI (International Mobile Subscriber Identity). In a GSM network a subscriber is identified on the basis of the IMSI. In Figure 1 the HLR is connected through an SS7 (Signalling System 7), for example to a mobile switching centre MSC and an intra-operator backbone network. Between the SS7 signalling system and the intra-operator backbone network there can be a direct connection or an SS7 gateway node. In principle, the HLR can exchange packet-switched messages with any GPRS node. The HLR's method of communication and its connection to the GPRS network are not, however, essential to the invention.

When packet data is sent to a mobile station, the data will be routed to the correct GSM network via the gateway node GGSN to the support



node SGSN in which the location of the mobile station is known. If the mobile station is in standby mode, its location is known with the accuracy of a Routing Area (RA). Correspondingly, if the mobile station is in ready mode, its location is known with the accuracy of a cell.

5           Figure 2 shows signalling associated with a routing area update. Temporally the process is from top downwards. In step 2-0 the mobile station MS receives data via the gateway node GGSN and a first support node SGSN<sub>1</sub>. Next the mobile station MS moves from the area of the first (e.g. the old) support node SGSN<sub>1</sub> to the area of a second (i.e. a new) support node  
10   SGSN<sub>2</sub>. In step 2-1 it sends to the new support node SGSN<sub>2</sub> a ROUTING AREA UPDATE REQUEST. In step 2-2 the new support node SGSN<sub>2</sub> sends to the old support node SGSN<sub>1</sub> an SGSN CONTEXT REQUEST message, requesting for a mobile subscriber's contact information, i.e. what is known as context data,  
15   via the new support node to the mobile station. This step will be described in greater detail in the description of the problem.

          In step 2-4 the SGSN<sub>2</sub> sends the requested PDP context data. In step 2-5 the new SGSN<sub>2</sub> sends to the gateway node GGSN as many UPDATE PDP CONTEXT REQUEST messages as there are active connections to the mo-  
20   bile station concerned. This number is denoted by n. In step 2-6 the GGSN replies by sending n acknowledgements. In step 2-7 the new SGSN<sub>2</sub> sends to the home location register HLR a routing area update message UPDATE GPRS LOCATION. In step 2-8 the home location register HLR cancels the subscriber data of the mobile station MS in the old support node SGSN<sub>1</sub>. Step 2-9 in-  
25   volves a corresponding acknowledgement. In step 2-10 the HLR sends the subscriber data of the mobile station in a message INSERT SUBSCRIBER DATA. Steps 2-11 to 2-15 are notices of acceptance and acknowledgements to previously sent messages.

          The ETSI (European Telecommunications Standards Institute)  
30   GPRS recommendation 09.60 (version 5.0) states that the old support node SGSN<sub>1</sub> is to send data packets associated with a subscriber's PDP context after it has sent the context data (message 2-4) to the new support node. Said recommendation also states that when the new support node receives data packets associated with an unknown PDP context, the new support node is to  
35   send an error message to the old support node.

          A problem in the above prior art arrangement arises when the mes-

sage containing the PDP context data of step 2-4 is delayed en route or is not sent until the old support node SGSN<sub>1</sub> already has sent data to the new support node SGSN<sub>2</sub>. The data stream 2-3 (divided into partial steps 2-3a, 2-3c and 2-3d) in Figure 2 shows such a situation. In step 2-3a the old support node SGSN<sub>1</sub> receives data addressed to a mobile station MS and in step 2-3c it sends data stored in its memory and addressed to the mobile station MS to the new support node SGSN<sub>2</sub>, which is to relay the data to the mobile station MS (as step 2-3d shows). However, in reality this is not the case since at this stage the new support node SGSN<sub>2</sub> has not yet received the context data on the mobile station. In other words, the SGSN<sub>2</sub> does not know what to do with the data packets.

A parallel problem arises when the tunnelling protocol GTP (GPRS Tunneling Protocol) of the new support node relays the message presented in step 2-4 and containing subscriber context data to an MM unit (Mobility Management) of the support node SGSN<sub>2</sub> for further processing. The purpose of this operation is for the MM unit to request the GTP to take corresponding measures if the subscriber has active PDP contexts, i.e. to provide the required tunnels. If data packets immediately follow the message of step 2-4, the SGSN<sub>2</sub> does not in this case either identify the PDP context with which the data packets are associated.

#### BRIEF DESCRIPTION OF THE INVENTION

It is an object of the invention to provide a method and an equipment for implementing the method to solve the above problems. The objects of the invention are achieved by a method and arrangement which are characterized by what is disclosed in the independent claims. The preferred embodiments of the invention are disclosed in the dependent claims.

A straightforward solution would be to buffer data packets in a new support node, but a support node will find it difficult to buffer data the subscriber data of whose real owner it is not aware of. Simple data buffering in a new support node would give rise to the following problems:

According to a chain of events, a new support node receives data packets associated with an unknown PDP context. The new support node discards the data packets and sends an error message to the old support node (which sent the data packets). The error message results in the PDP context being deleted from the registers of the old support node. As a consequence,

the tunnelling associated with the context is terminated. If the new support node resends the context request (message 2-2), the old support node does not include in the reply message 2-4 the deleted PDP context, and thus the new support node is unaware of the subscriber's active contexts. Alternatively,  
5 the deleted PDP context is included in the reply message, but no tunnelling is performed.

According to another chain of events, the gateway node GGSN tunnels mobile-terminating data packets to the old support node. If the old support node receives data packets associated with an unknown (recently  
10 deleted) PDP context, it sends an error message to the gateway node. Having received the error message, the gateway node deletes the PDP context from its registers. If the gateway node is not sending mobile-terminating packets at the moment when the routing area between the support nodes is being up-  
15 dated, the gateway node assumes that the PDP context is active, even though it has been deleted from the support node.

The invention is first of all based on detecting a shortcoming in the GPRS recommendation 09.60. The invention is also based on supplementing the functionality of the support node SGSN as follows. In accordance with the invention, a condition is defined, upon the fulfilment of which it is at least  
20 probable that the second (new) support node SGSN<sub>2</sub> has at its disposal the context data of the mobile station. When the routing area is being updated, at least one support node (SGSN<sub>1</sub> or SGSN<sub>2</sub>) delays data transmission until said condition is fulfilled.

The fact that the second support node SGSN<sub>2</sub> is at least likely to  
25 have at its disposal the context data of the mobile station can be ascertained in various ways. According to a first embodiment of the invention, when the location of a mobile station is updated from the old support node to a new support node, and the old support node has sent the context data of the mobile station to the new support node, the old support node waits for a prede-  
30 termined period of time until it sends to the new support node data packets addressed to the mobile station concerned. The predetermined waiting time is sufficiently long to make it at least very likely that the context data has had time to reach the new support node and that the node has had time to respond to them (create required tunnels etc.).

35 According to an alternative, the waiting time is a fixed, empirical period of time, e.g. in the order of 2 seconds. The waiting time serves to ensure

that the new support node has time to resend the request for context data (message 2-2) in case the first message disappears en route. Similarly, the old support node does not send data packets substantially simultaneously with context data, so that data packets cannot overtake context data en route. It is reasonable to make the waiting time depend on the quality of Service (QoS) so that the time is shorter at higher qualities of service, e.g. 0.5 s.

According to a preferred alternative, the new support node informs the old support node of the waiting time, preferably in the same message in which it requests context data from the old support node. This is because the new support node knows best how its retransmission timer has been set. The most suitable value for the waiting time is slightly longer than the time set for the retransmission timer. Alternatively, the new support node could naturally reveal the time set for its retransmission timer, whereby the old support node would add a small margin to it.

According to another alternative, the predetermined waiting time is not fixed, but the old support node waits for an acknowledgement from the new support node, i.e. confirmation that the new support node has received the context data it requested. Not until having received said acknowledgement does the old support node send to the new support node data packets addressed to the mobile station. In this case the new support node is not likely, but is certain to have at its disposal the context data of the mobile station.

An advantage of the second alternative is e.g. that there is no such delay as was presented in the first embodiment, associated with a routing area update, since normally the new support node sends an acknowledgement almost immediately. However, a marginal drawback is an extra acknowledgement message and the increased signalling load caused by it.

A further advantage of the second alternative is that it will solve the problem even in case a message sent in step 2-4 and containing context data should disappear en route. Even in this case the prior art new support node SGSN<sub>2</sub> is unable to receive data packets addressed to the subscriber concerned, since it has no idea what to do with the data packets. According to an advantageous alternative of a second embodiment, the SGSN<sub>1</sub> waits for the acknowledgement message for a given maximum period of time and then resends the context data.

In accordance with the second embodiment, the second, i.e. new support node delays data transmission. The following arrangement takes

place in the new support node. When the new support node (and particularly its GTP unit) receives data packets not associated with any PDP context, the support node does not discard the received data packets, but stores them and checks whether a routing area update between support nodes is in progress in the support node. Should at least one such routing area update be in progress, the new support node stores the received and successive data packets which are not associated with any PDP context. These packets may be either associated with a temporary context or stored in memory, from which they are retrieved once the ongoing routing area update has been terminated.

If no routing area update between support nodes is in progress in the support node, the support node follows the prior art procedure, i.e. discards the data packets and sends an error message to the support node that sent the packets.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in the following in greater detail in association with preferred embodiments with reference to the attached drawings, in which

Figure 1 shows the architecture of a packet radio network;

Figure 2 shows signalling associated with routing area maintenance in accordance with the prior art;

Figures 3 and 4 shows signalling associated with routing area maintenance in accordance with different alternatives of a first embodiment of the invention; and

Figure 5 is a flow diagram of a second embodiment of the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

Figure 3 shows signalling associated with routing area maintenance in accordance with a first embodiment of the invention. In this case the other steps are the same as were described in association with Figure 2, but steps 2-3a to 2-3d (data transmission via the old support node SGSN<sub>1</sub>) have been replaced by steps 3-3a to 3-3d. Step 3-3a corresponds to step 2-3a. In this step the SGSN<sub>1</sub> receives data packets addressed to a mobile station. In step 3-3b the SGSN<sub>2</sub> waits for a fixed period of time (which preferably depends on the quality of service of the connection). After the waiting time, in step 3-3c, the SGSN<sub>1</sub> sends the data packets in its memory to the SGSN<sub>2</sub>, which relays them to the mobile station MS in step 3-3d. Thereafter the embodiment shown

in Figure 3 comprises steps 2-5 to 2-15, but they will not be shown nor described again.

Figure 4 shows signalling associated with routing area maintenance in accordance with an alternative implementation of the first embodiment of the invention. In this case, too, the steps, which are not separately described (2-0 to 2-2 and 2-5 to 2-15), are the same as in the prior art, Figure 2. Steps 2-3a to 2-3d (data transmission via the old support node SGSN<sub>1</sub>) have been replaced by steps 4-3a to 4-3d. In step 4-3a the SGSN<sub>1</sub> receives data packets addressed to a mobile station. In step 4-3d the old SGSN<sub>1</sub> waits for an acknowledgement message sent by the new SGSN<sub>2</sub> in step 4-4' and called herein SGSN CONTEXT ACKNOWLEDGE. In step 4-3c the old SGSN<sub>1</sub> sends the data packets in its memory to the new the SGSN<sub>2</sub>, which relays them to the mobile station MS in step 4-3d.

Figure 5 is a flow diagram of a second embodiment of the invention. In step 50 the new support node SGSN<sub>2</sub> (and particularly its GTP unit) receives data packets which are not associated with any PDP context. In step 51 the support node checks whether a routing area update between support nodes is in progress. If so, in step 53 the support node associates the packets with a temporary context. When it is detected in step 54 that the routing area update has been terminated, the process proceeds to step 55 in which the SGSN<sub>2</sub> sends the packets to the recipient. If it is detected in step 51 that no routing area updates between support nodes are in progress, the process proceeds to step 52, in which the packets are discarded and an error message sent to the sender of the packets.

It is obvious to a person skilled in the art that as technology advances, the inventive concept can be implemented in several different ways. Thus the invention and its embodiments are not limited to the examples described above, but may vary within the scope of the claims.

## CLAIMS

1. A method of transmitting data in a packet radio network to a mobile station (MS) performing a routing area update, the network comprising at least a first support node (SGSN<sub>1</sub>) and a second support node (SGSN<sub>2</sub>);

5 in which method

the packet radio network sends data (2-0, 2-3a) to the mobile station (MS) via the first support node (SGSN<sub>1</sub>);

the mobile station (MS) sends a routing area update message (2-1) to the second support node (SGSN<sub>2</sub>), which sends to the first support node (SGSN<sub>1</sub>) a request (2-2) for the context data (2-5) of the mobile station from the first support node;

the first support node sends (2-3c, 3-3c, 4-3c) from its memory data addressed to a mobile station to the second support node;

**characterized** in that

15 a condition is defined, upon the fulfilment of which it is at least probable that the second support node (SGSN<sub>2</sub>) has at its disposal the context data of the mobile station; and

when the routing area is being updated, at least one support node (SGSN<sub>1</sub>, SGSN<sub>2</sub>) delays data transmission until said condition is fulfilled.

20 2. A method as claimed in claim 1, **characterized** in that the first support node (SGSN<sub>1</sub>) waits for a predetermined period of time (3-3b, 4-3b) before sending data to the second support node (SGSN<sub>2</sub>).

25 3. A method as claimed in claim 2, **characterized** in that said predetermined period of time (3-3b) is fixed at least for each quality of service.

4. A method as claimed in claim 3, **characterized** in that the predetermined period of time (3-3b) depends on the quality of service of the connection used by the mobile station (MS).

30 5. A method as claimed in any one of claims 3 to 4, **characterized** in that said fixed period of time is determined by the second support node (SGSN<sub>2</sub>) notifying to the first support node (SGSN<sub>1</sub>) the time which substantially corresponds to the time setting of the retransmission timer of the second support node and by one of the support nodes adding a small security margin to this time.

35 6. A method as claimed in claim 1, **characterized** in that

before data transmission to the second support node (SGSN<sub>2</sub>), the first support node (SGSN<sub>1</sub>) waits for a separate acknowledgement message (4-4') from the second support node, the message indicating that the second support node has received the context data (2-4) of the mobile station.

- 5           7. A method as claimed in claim 6, **characterized** in that the first support node (SGSN<sub>1</sub>) waits for said acknowledgement message (4-4') for a predetermined maximum period of time and resends the context data if it does not receive the acknowledgement message within this time.

8. A method as claimed in claim 1, **characterized** in that:  
10           the second support node (SGSN<sub>2</sub>), which receives data packets not associated with any PDP context, checks whether a routing area update between support nodes is in progress; and

- if a routing area update between support nodes is in progress, the second support node (SGSN<sub>2</sub>) stores the packets in memory until the routing  
15           area update has been terminated, and then sends the packets to the receiver.

9. A support node (SGSN<sub>1</sub>, SGSN<sub>2</sub>) in a packet radio network, the node being arranged to support data transmission in a packet radio network to a mobile station (MS) performing a routing area update; **characterized**  
15           in that during a routing area update the support node (SGSN<sub>1</sub>, SGSN<sub>2</sub>) is arranged to  
20           observe the fulfilment of a condition indicating that the second support node (SGSN<sub>2</sub>) is at least likely to have at its disposal the context data of the mobile station; and

            delay data transmission until said condition is fulfilled.




# **ABSTRACT**

**For**

## **ROUTING AREA UPDATE IN PACKET RADIO NETWORK**

A method of transmitting data in a packet radio network to a mobile station performing a routing area update. The packet radio network transmits data to the mobile station via a first support node. The mobile station sends a routing area update message to a second support node, which sends to the first support node a request for context data of the mobile station from the first support node. The first support node sends from its memory, data addressed to the mobile station to the second support node. It then waits for a predetermined period of time before sending the data to the second support node. The predetermined time may be fixed, depending preferably on the quality of service of the connection used by the mobile station. Alternatively the predetermined period of time expires when the second support node sends to the first support node a separate acknowledgement message indicating that the second support node has received the context data of the mobile station.

# Fi. I

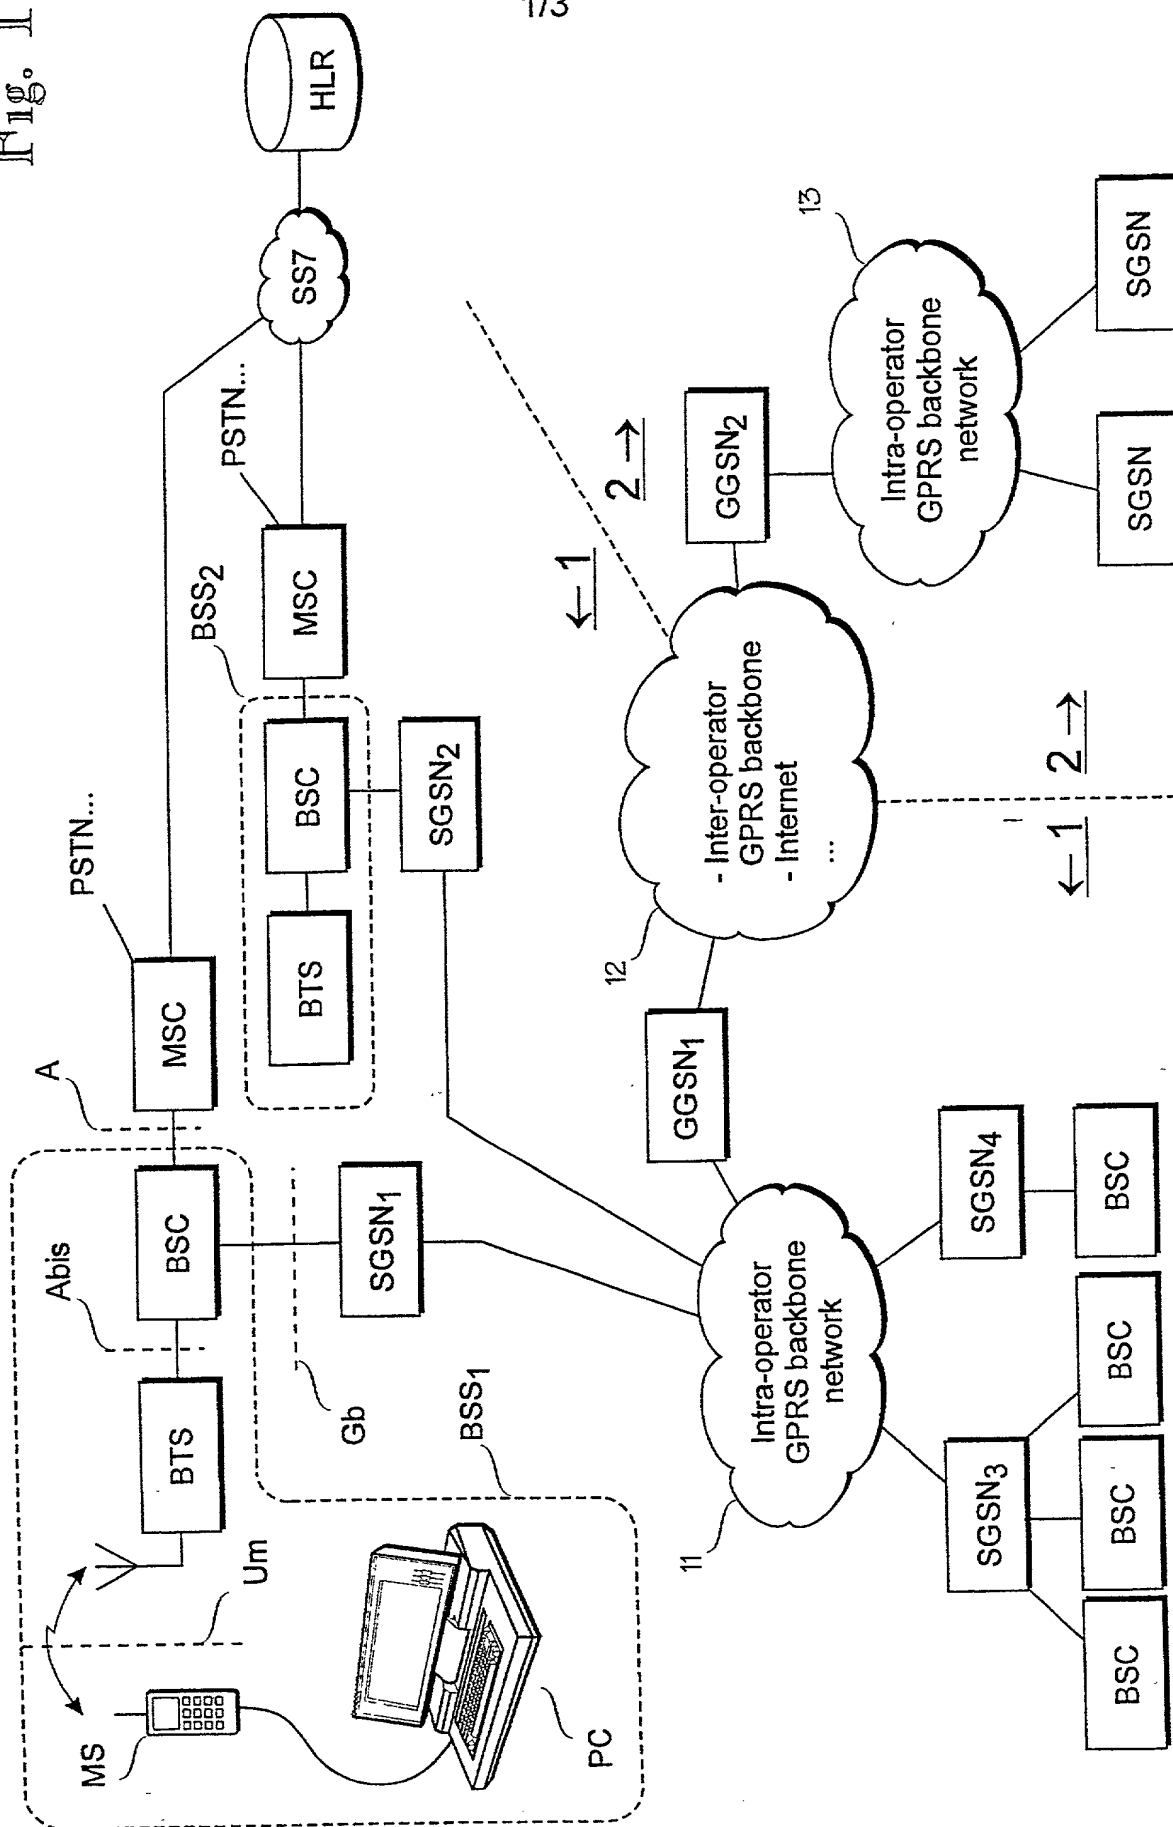

2/3

Fig. 2


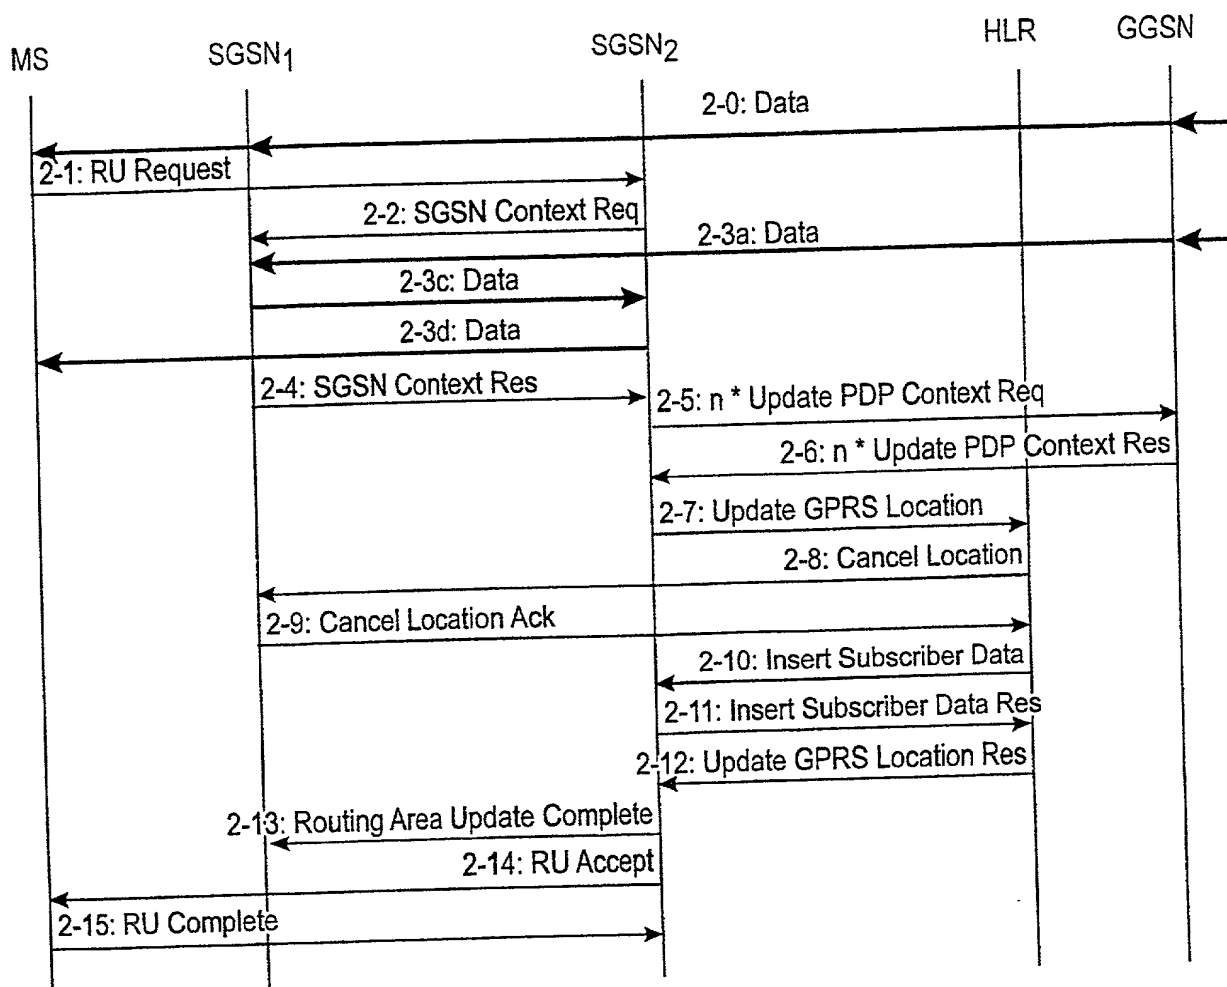


Fig. 3

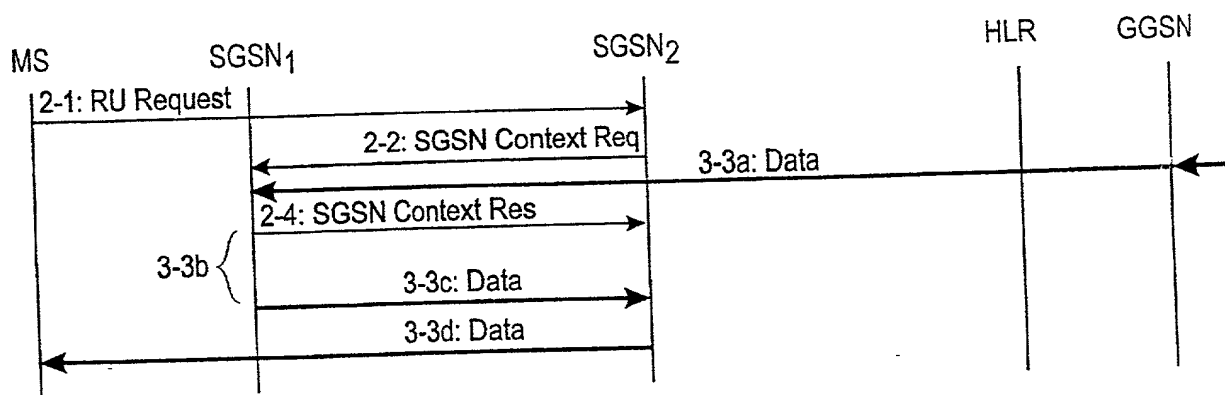

2-5 ... 2-15

Fig. 4


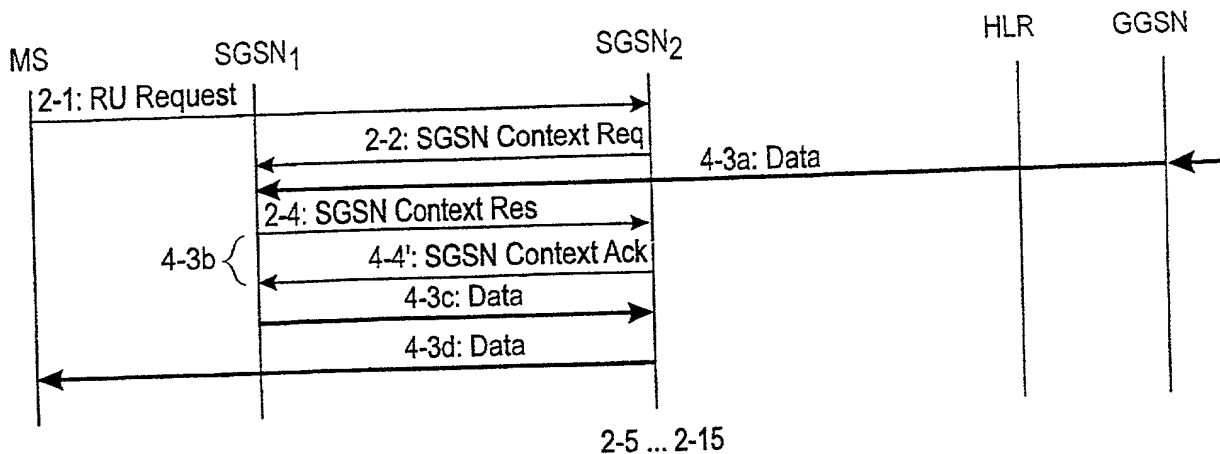


Fig. 5

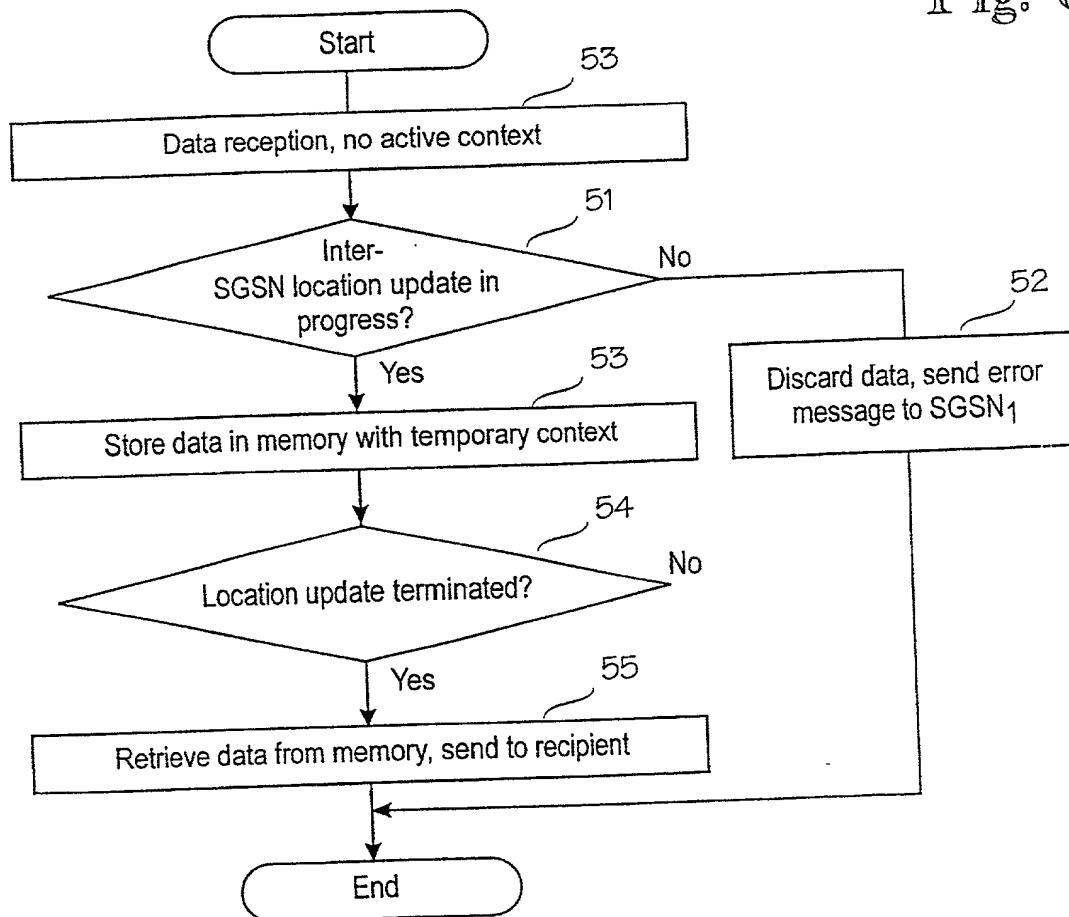

**Altera Law Group, LLC****Declaration and Power of Attorney Patent Application  
(Design or Utility)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: ROUTING AREA UPDATE IN PACKET RADIO NETWORK

the specification of which

- ☐ is referred to by Altera reference number on a separate document  
☒ is attached hereto  
☐ was filed on \_\_\_\_\_ as application serial no. \_\_\_\_\_ and or PCT International  
 Application number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information know to me to be material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or 35 U.S.C. §365(b) of any foreign application(s) for patent or inventor's certificate, or 35 U.S.C. §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate of PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)		
Number 980340	Country Finland	Day/Month/Year Filed 13 February 1998
Number	Country	Day/Month/Year Filed
Number	Country	Day/Month/Year Filed

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

Prior Provisional Application(s)	
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or under 35 U.S.C. §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. or International Application(s)		
Serial Number PCT/FI99/00106	Day/Month/Year Filed 11 February 1999	Status (patented, pending, abandoned) Pending
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Steven R. Funk            Reg. No. 37,830  
David W. Lynch            Reg. No. 36,204  
Karen D. McDaniel        Reg. No. 37,674

Mark A. Hollingsworth    Reg. No. 38,491  
Michael B. Lasky            Reg. No. 29,555  
Iain A. McIntyre            Reg. No. 40,337

I hereby authorize them or others whom they may appoint to act and rely on instructions from and communicate directly with the person/organization who/which first sends this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct Altera Law Group, LLC otherwise.

Please direct all correspondence in this case to Altera Law Group, LLC at the address indicated below:

Michael B. Lasky  
Altera Law Group, LLC  
10749 Bren Road East, Opus 2  
Minneapolis, MN 55343

Full Name of Sole or First Inventor		
Family Name Forssell	First Given Name Mika	Second Given Name
Residence and Citizenship		
City of Residence Espoo	State or Country of Residence Finland	Country of Citizenship Finland
Post Office Address		
Street Address Bertel Jungin aukio 4 C 40	City FIN-02600 Espoo	State & Zip Code or Country Finland
Signature of Inventor		Date

Full Name of Second Inventor, if any		
Family Name Puuskari	First Given Name Mikko	Second Given Name
Residence and Citizenship		
City of Residence Helsinki	State or Country of Residence Finland	Country of Citizenship Finland
Post Office Address		
Street Address Angervotie 5 C 35	City FIN-00320 Helsinki	State & Zip Code or Country Finland
Signature of Inventor		Date